
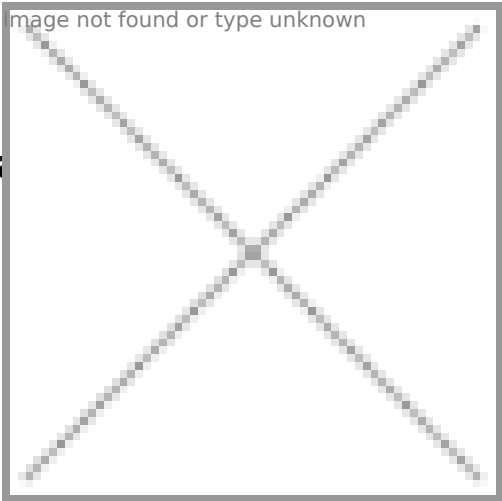


AGRIFLAT PU Poliuretha

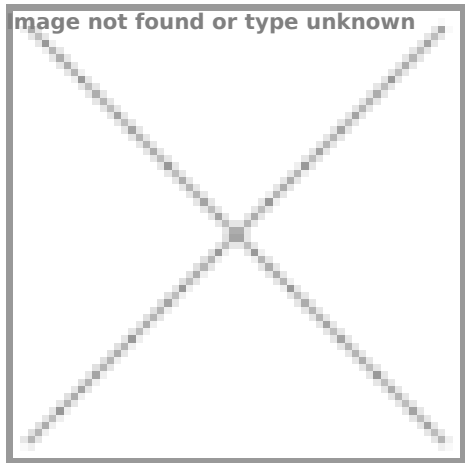

ersal industrial and agricultural use. It's
ed. The material of the hose is
and moderately acid and alkali resistant. It
thanks to the tensile strenght of the

table insertion.

It's ozone and ageing resistant.

WP: 14 bar

max. WP: 17 bar

BP: 42 bar

Temperature: -50°C / +75 °C

Construction: Poliéter Poliuretan, fekete vagy zöld (aktuális készletből és gyártástól függően)

Coil length: 100 és 200 m

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

ID	Wall thickness (mm)	kg/m	Tensile strength	Article Nr.
102	3,3	1,15	13800	999703
127	3,4	1,5	17000	999701
152	3,7	1,7	17900	999702

