
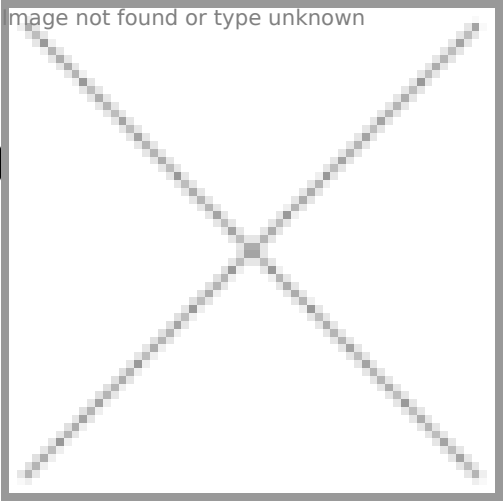


AIRDUC® TPE 363 (MD)

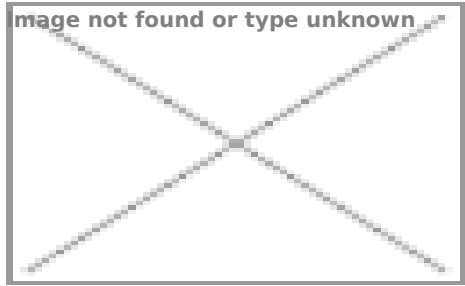

Heavy (up to +150°C)

hot and cold gases and for powder, bulk

hot air dryer

heating air at the extrusion tool

textile industry, steam soaking: steam iron, industrial ironing machine, smoothing iron

- air supply: UV dryer, IR dryer
- bus, utility vehicle, caravan/ trailer, mobile home/ camper/ RV, boat, ship/ vessel/ marine, yacht: ventilation, heating
- compressor, side channel blower, vacuum pump, pressure pump, pump
- paper mill, paper and pulp industry: waste water, air extraction
- heating system/ heater: fresh air supply

Properties

- medium-heavy duty
- very good heat resistance
- good resistance to oil, gasoline and chemicals
- good resistance to alkalis and acids
- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

•

Delivery variants

- further diameters and lengths available on request
- black (standard)
- special colours: full coloured
- customer-specific branding

•

Design

- AIRDUC® profile hose
- 1. spring steel wire firmly embedded in wall
- 2. Wall: thermoplastic rubber (TPE) (US version: antistatic thermoplastic rubber)
- 3. wall thickness 0,8 mm approx.

•

Temperature Range

- -40°C to 125°C
- short time to 150°C

Hőállóság: -40°C /+125 °C rövid ideig + 150°C

Felépítés: poliuretán, fekete,, beágyazott acélspirállal, belül közel sima, kívül hullámos

Falvastagság: 1 mm a spirálok között

On stock at the manufacturer, short delivery

ID	OD	Pressure (bar)	Vákuum	On stock in germany	Cikkszám
30	38	0,93	0	Nem	363-0030-0000
32	40	0,87	0	Igen	363-0032-0000
38	46	0,74	0,17	Igen	363-0038-0000
40	48	0,7	0,17	Igen	363-0040-0000
44-45	53	0,63	0,16	Nem	363-0045-0000
50-51	58	0,56	0,15	Igen	363-0050-0000
60	68	0,47	0,11	Igen	363-0060-0000
63-65	73	0,44	0,1	Igen	363-0065-0000
70	78	0,41	0,08	Nem	363-0070-0000
75-76	83	0,38	0,08	Nem	363-0075-0000
80	88	0,36	0,07	Igen	363-0080-0000
89-90	98	0,32	0,06	Igen	363-0090-0000
100-102	108	0,29	0,05	Igen	363-0100-0000
110	118	0,26	0,04	Nem	363-0110-0000
125-127	133	0,23	0,03	Igen	363-0125-0000
130	138	0,22	0,03	Nem	363-0130-0000
150-152	158	0,19	0,03	Igen	363-0150-0000
178-180	188	0,16	0,02	Nem	363-0180-0000
200-203	208	0,14	0,02	Igen	363-0200-0000
250	258	0,11	0,02	Nem	363-0250-0000

