
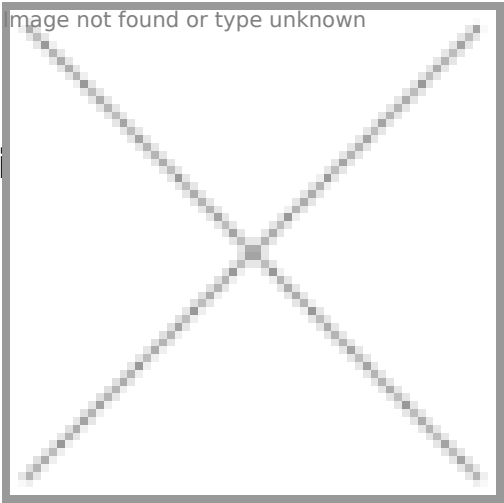


ALL COLOR Solvent resistant

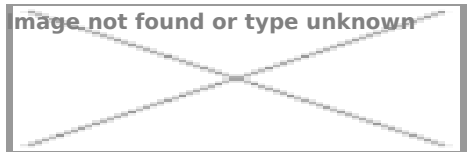

small diameters

t and solvent transporting.
erent diameters, request a quotation.

bursting pressure 5 bar

Heat resistance: -35°C/+100°C (depending on the transfered medium)

Interior: UPE, smooth

Exterior: EPDM rubber, black, fabric imprinted, electrically conductive (106Ω), abrasion ozone and weather resistant

Roll size: 40 m

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Wall thickness (mm)	Beding radius (mm)	Vacuum (bar)	Weight (kg/m)	Article number
6	3,5	40	-0,5	0,12	230541
8	3,5	50	-0,5	0,14	230543
10	3,5	60	-0,4	0,17	230546
13	3,5	80	-0,4	0,21	230544
16	3,5	100	-0,4	0,24	230542
19	5	120	-0,4	0,41	230549
25	5	150	-0,3	0,52	230547
32	6	200	-0,3	0,75	230548