
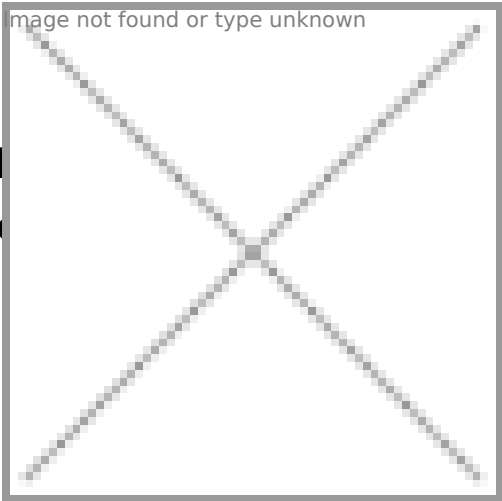


Clamp 212 EC Bridge Clamp (with
strip) for attaching external hoses

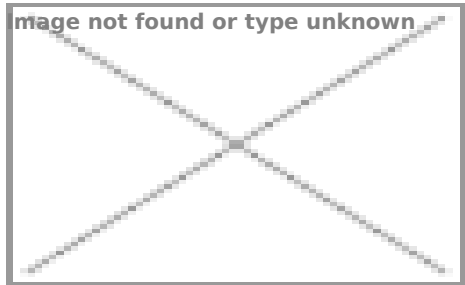

Clamp 212 EC Bridge Clamp (with
strip) for attaching external hoses

Clamp 212 EC Bridge Clamp (with
strip) for attaching external hoses

- easily and quickly fitted
- re-usable
- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

DESIGN

- Quality: W2; Clamp strip: stainless steel 1.4301 = AISI 304; Screw: galvanised steel; Body: stainless steel 1.4016 = AISI 430; Bridge: stainless steel 1.4301 = AISI 304 (INOX)
- in accordance with DIN 3017

DELIVERY VARIANTS


- further diameters available on request (MOQ)
-

SUITABLE FOR HOSE

- AIRDUC®: 341 + 345 + 363; 351 + 355 (FOOD / INOX FOOD-AS / HT / EC); 355 AS; 362 (FOOD / EC); TIMBERDUC®: 533 AS

On stock at the manufacturer, short delivery time with regular shipments

Hose DN (mm)	Band width (mm)	Clamping range (mm)	Article Nr.
38-45	9	32-55	212-0035-2878
50-55	9	45-65	212-0045-2878
60-65	9	55-75	212-0055-2878
70-75	9	65-85	212-0065-2878
80-85	9	75-95	212-0075-2878
90-95	9	85-105	212-0085-2878
100-105	9	95-115	212-0095-2878
110-115	9	105-125	212-0115-2878
120-127	9	115-135	212-0125-2878
130-135	9	125-145	212-0125-2878
140-145	9	135-155	212-0135-2878
150-155	9	145-165	212-0145-2878
160-165	9	155-175	212-0155-2878
190-195	9	185-205	212-0185-2878
200-205	9	195-215	212-0195-2878

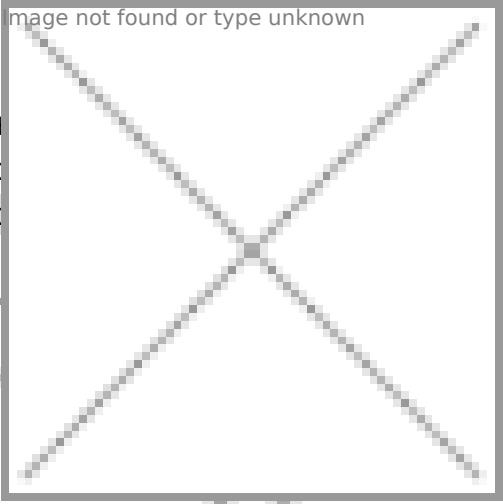			
Hose DN (mm)	Band width (mm)	Band length (mm)	Article Nr.
250-255	10		212-0245-2878
350-355	10		212-0345-2878

