
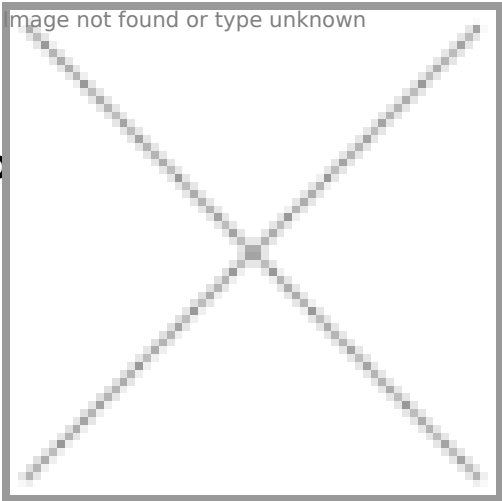


Compressed air claw connector

post-constrained

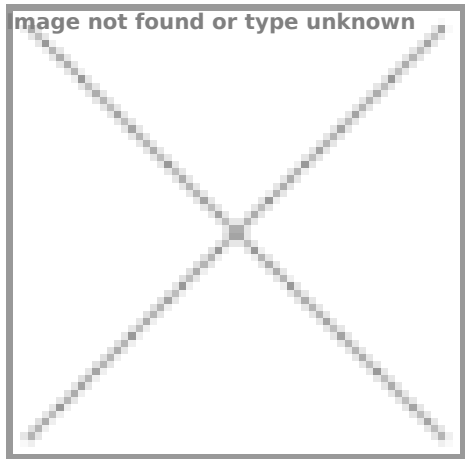

h claw is made of galvanized steel alloy

ring on it, which is safe and prevents
esistant sealing for it is also available!

It's great quality from Germany.

Operating pressure: 16 bar

Heat range: -40/+95 C

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

Hose ø (mm)	Claw distance (mm)	Article number
10	42	101071
13	42	101072
15	42	101073
19	42	101074
25	42	101075