
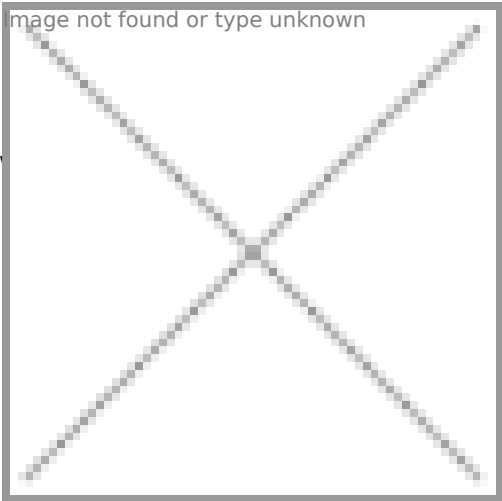


Female quick coupling
pneumatic couplig

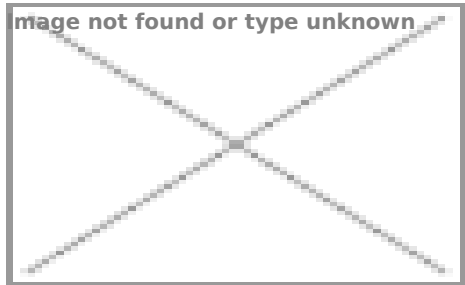

Female quick coupling,

sign until it's in stock or for order.

nm

Operating pressure: Max. 35 bar

Heat resistance: -20 / +100 °C

Flow: max. 100 l/m

Design: with valve

Compatible: with Rectus 25-26 series

Not compatible: with Orion 44510

Sealing: NBR

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

Nickel-plated brass

Female thread	Article number
G 1/4"	131032
G 3/8"	131006
G 1/2"	131007

Brass

Female thread	Article number
G 1/4"	101050
G 3/8"	101051
G 1/2"	101052