
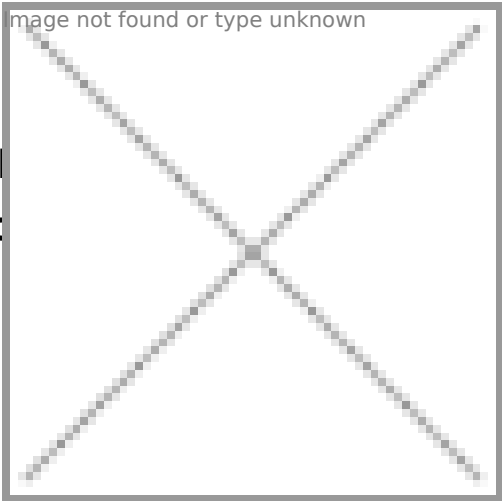


HOTCALOR BLUE and R machine, works with hot

ection molding

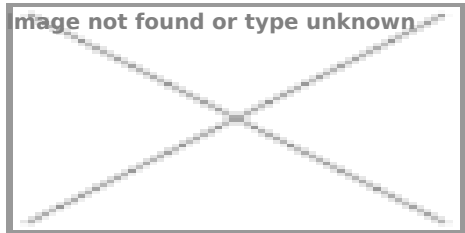

lastic industry’s tempering liquid of the
d and hot line can be easy differentiate by

Working pressure: 20 bar +20°C-on

Burst pressure: 60 bar +20°C-on

Temperature: -20°C / +140°C (nem használható gőzre)

inside: EPDM, fekete, sima

outside: EPDM, kék, sima

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Belső Ø (mm)	Falvastagság (mm)	Külső Ø (mm)	Súly (kg/m)	Szín	Cikkszám
9,5	3,5	16,5	0,25	Kék	999615
12,7	4,4	21,5	0,363	Kék	999618
19	4	27	0,45	Kék	999621
25	5	35	0,8	Kék	999622
9,5	3,5	16,5	0,25	Piros	999616
12,7	4,4	21,5	0,363	Piros	999617
19	4	27	0,45	Piros	999619
25	5	35	0,8	Piros	999620

