
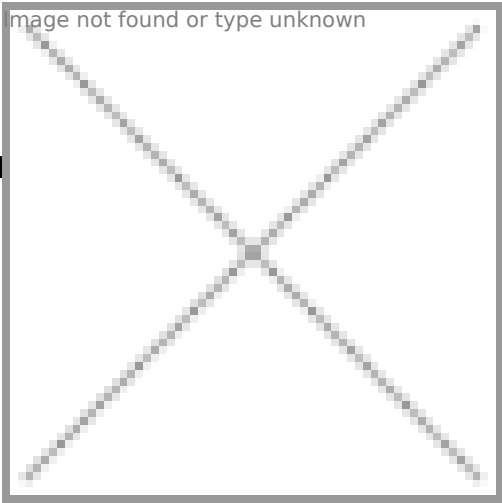


KALIVENTIL 400 Suction
HiTex 480

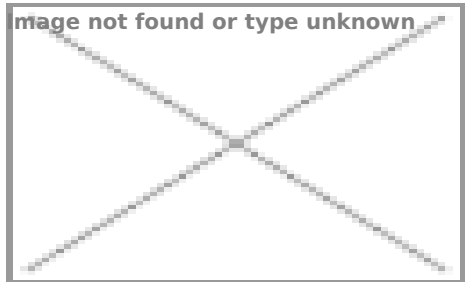

up to 400 °C - CP

resistance and flexible. It's suitable for air, gas. It can be compressed longitudinally from DN 38 to DN 1016!

- Heat resistance:** -60°C / +400°C (for short time +450°C)
- Structure:** stainless stell strand reinforcement, special glass fibre coating
- interior:** gray
- Exterior:** gray, exterior steel spiral
- Roll size:** 3 and 6 m – it can be manufactured with different lengths
- Standard:** DIN 4102-B1

Will be manufactured with short delivery time. MOQ 3 m

Inside diameter (mm)	Weight kg/m	bending radius mm	Vacuum (bar)	Article Nr.
38	0,55	21	-0,45	480-0038-0000
40	0,58	22	-0,44	480-0040-0000
50	0,74	25	-0,38	480-0050-0000
60	0,87	28	-0,32	480-0060-0000
63-65	0,94	30	-0,29	480-0065-0000
70	1	31	-0,26	480-0070-0000
80	1,13	34	-0,2	480-0080-0000
100-102	1	51	-0,12	480-0100-0000
150-152	1	38	-0,05	480-0150-0000
160	1,07	38	-0,045	480-0160-0000
180	1,2	44	-0,04	480-0180-0000
203	1,32	48	-0,03	480-0200-0000
254	1,68	60	-0,02	480-0254-0000
300	1,97	69	-0,015	480-0300-0000
305	2	69	-0,015	480-0305-0000

