
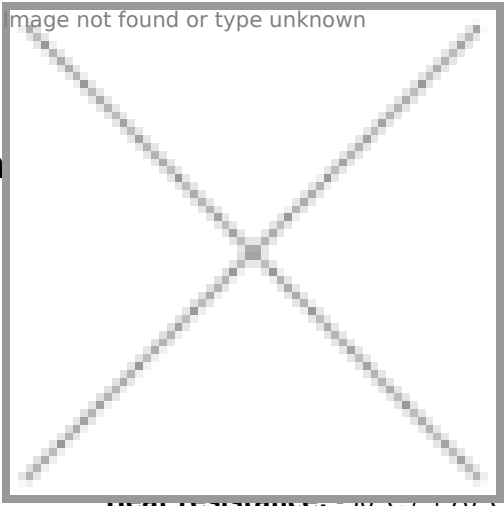


Kompressflat/yellow Latex hose

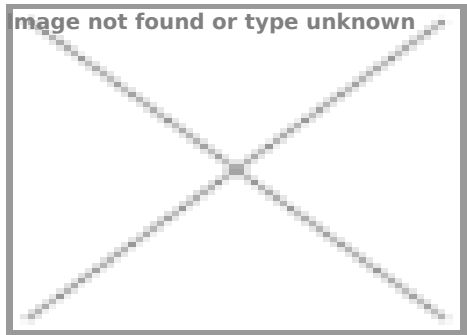

is lightweight. It's persistent against oils and acids. It's easy to transport because of the lightweight and flexible nature. These features make the hose especially practical for use in confined spaces or scaffolds. The hose is ozone, ageing and UV resistant.

Heat resistance: 50 °C / 170 °C

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø coll	Inside ø mm	Wall thickness mm	Weight g/m	Operating/ Fracturing pressure (bar)	Roll size m	Article number
3/4	21,0-21,5	1,9	120	20/70	60	961001
1	26,5-27,5	1,9	150	20/70	60	961105