
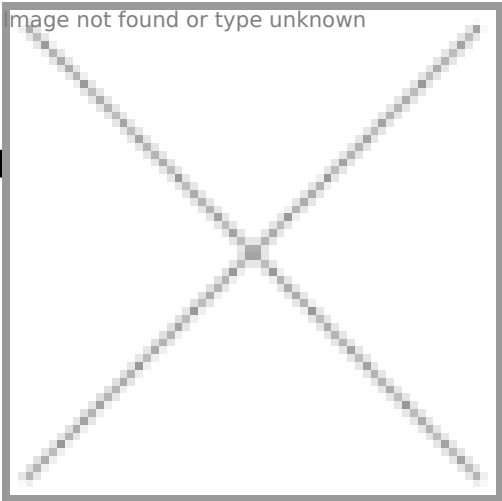


Male quick coupling with
couplig

coupling, pneumatic

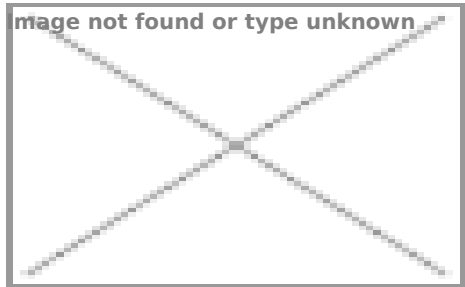

sign until it's in stock or for order.
(m)

- Operating pressure:** Max. 35 bar
- Heat resistance:** -20 / +100 °C
- Flow:** max. 100 l/m
- Design:** with valve
- Compatible:** with Rectus 25-26 series
- Not compatible:** with Orion 44510
- Sealing:** NBR

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

Nickel-plated brass

Hose diameter mm	Article number
6	130009
8	130020
9	131022
10	130027
13	130004

Brass

Hose diameter mm	Article number
6	101036
8	101037
9	101038
10	101039
13	101040