
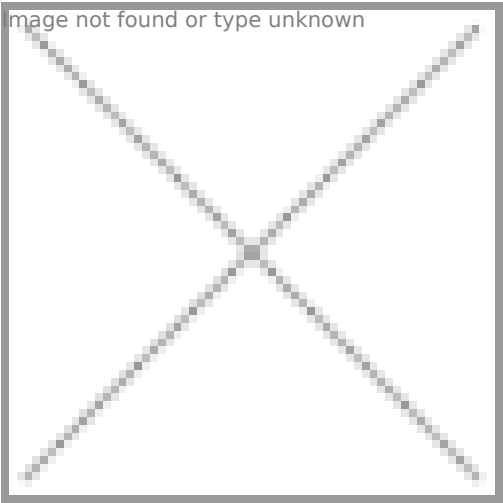


Radiacord Rubber cooling hoses

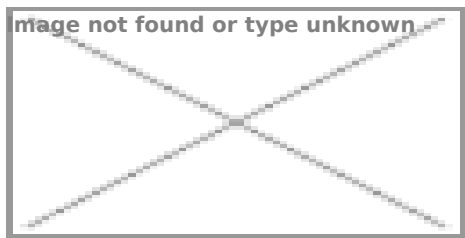

Interior: EPDM, black

It's persistent against antifreeze fluid. It has excellent chemical resistance.

MAX. 100°C LOTNR**

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Plane

Inside Ø (mm)	Wall thickness (mm)	Outside Ø (mm)	Operating pressure (bar)	Heat resistance (°C)	Roll size (m)	Article number
10	3,5	17	6	-30/+100	40	3100 010000
13	3,5	20	6	-30/+100	40	3100 013000
15	3,5	22	6	-30/+100	40	3100 015000
18	3,5	25	6	-30/+100	40	3100 018000
20	3,5	27	6	-30/+100	40	3100 020000
22	3,5	29	6	-30/+100	40	3100 022000
25	3,5	32	6	-30/+100	40	3100 025000

Fabric imprinted

Inside Ø (mm)	Wall thickness (mm)	Outside Ø (mm)	Operating pressure (bar)	Heat resistance (°C)	Roll size (m)	Article number
28	3,5	35	4	-30/+100	40	3100 028000
30	3,5	37	4	-30/+100	40	3100 030000
32	3,5	39	4	-30/+100	40	3100 032000
35	3,5	42	4	-30/+100	40	3100 035000
38	3,5	45	4	-30/+100	40	3100 038000
40	3,5	47	4	-30/+100	40	3100 040000
42	3,5	49	4	-30/+100	40	3100 042000
45	4	53	4	-30/+100	40	3100 045000

Inside Ø (mm)	Wall thickness (mm)	Outside Ø (mm)	Weight (kg/m)	Temperature resistance (°C)	Roll size (m)	Article number
48	4	56	1,2	-30/+100	40	3100 048000
50	4,5	60	1,3	-30/+100	40	3100 050000
60	5	70	1,6	-30/+100	40	3100 060000
63	5	73	1,7	-30/+100	40	3100 063000
76	4	84	2,0	-30/+100	40	3100 075000
90	4	98	2,5	-30/+100	20	3100 090000
102	4	110	3,0	-30/+100	40	3100 100000
110	6	122	3,8	-30/+100	20	3100 110000

