


SEMPERIT IK25 high pressure hose

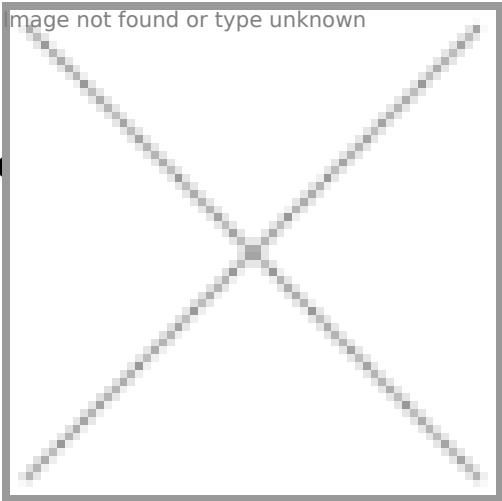

hose Sewer cleaning

or sewer cleaning vehicles,
sewers in industry,
structure.

Very cost effective due to its highly abrasion and weather resistant cover.
(Abrasion according to EN ISO 6945:2000, max 0.5g (100N)).

The smooth cover provides a low friction coefficient and is easily cleaned.

Other connections on request.

Every assembly has a unique serial number on the coupling which, refers to the accompanying test certificate.

High quality standards ensure maximum safety (each hose is pressure tested and the bore size is continuously checked electronically).

cover: NR/BR, black, resistant to ozone and weather,
abrasion resistant, antistatic, smooth.

Marking: continuous embossed tape, orange letters:
"SEMPERIT (S) IK 25 PN 250 bar Month/Year ZH
1/406 MADE IN EU //".

Felirat: SEMPERIT (S) IK25 PN 250 BAR - gyártási adatok -

Üzemi nyomás: 250 bar

biztonsági faktor: 2,5:1

Hőállóság: -30°C /+80°C

Belül: SBR fekete, antisztatikus, sima gumi

Kívül: NR/BR fekete, ózon- és időjárásálló, kopásálló, antisztatikus, sima gumi

Betétek: textil szövettel

Tekercsméret: 40, 60, 80, 100, 120, 160 m – egyéb hosszakra megnőhet a szállítási határidő

Just for order!

Belső Ø (mm)	Falvastagság (mm)	Külső Ø (mm)	Hajlítási sugár (mm)	Súly (kg/m)	szerelt hossz (m)	Gyári fitting	Cikkszám
13	6	25	70	0,46	40	G 1/2" KB	460058

Belső Ø (mm)	Falvastagság (mm)	Külső Ø (mm)	Összerelt hossz (m)	Gyári fitting	Cikkszám
13	6	25	60	G 1/2" KB	460060
13	6	25	80	G 1/2" KB	460001
25	7	35	120	G 1" KB	460218

