
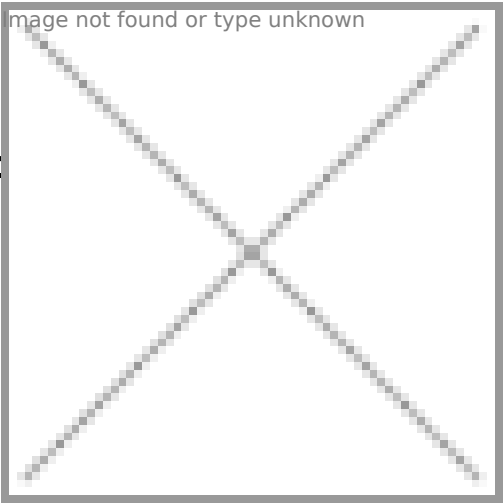


Silocord ® / SP Concret

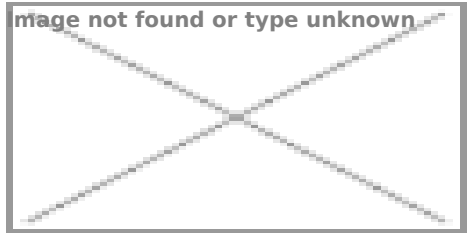

use
and other abrasive medium.

ENT / DRY - CARGO PN 6 BAR - M

- Operating pressure:** 6 bar
- Heat resistance:** -30°C/+80°C
- Interior:** NR/SBR, black, smooth
- Exterior:** SBR, black, fabric imprinted
- Linings:** steel spiral and steel wire helix
- Vacuum:** 0,8
- Electrical resistance:** $R < 10^6 \Omega$
- Abrasion resistance:** 70 mm³ according to ISO 4649 (earlier DIN 53516) standard

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Belső Ø (mm)	Falvastagság (mm)	Külső Ø (mm)	Tekercsméret (m)	Cikkszám
76	10	96	40	3535 076096
102	10	122	20,28*	3535 102122