
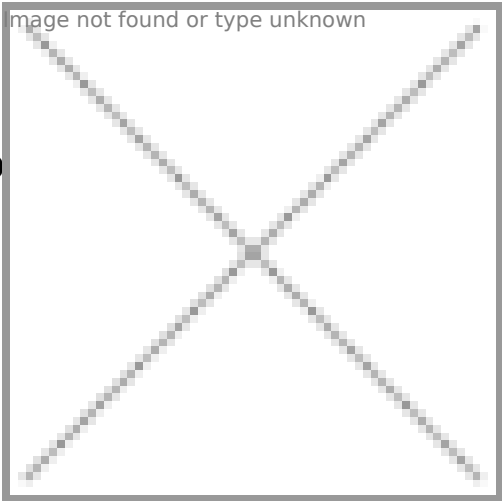


Silocord® / Alim /SP Ab
suction/discharge hose

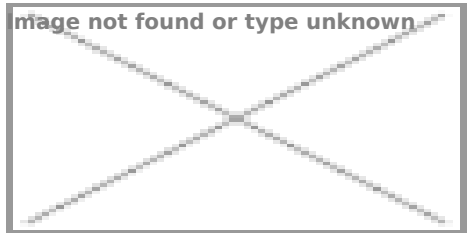

quality

VC-granulate, and grains. Static charge
ng the static wire.
ding to the right standards:

EG 1935-2004 / BfR XXI. 2002 cat. 4 FDA (CFR 21 § 177. 2600)

Felirat: ® SILOCORD® / ALIM GRANULATE PN 8 BAR - BfR XXI KAT. 4 - FDA

Operating pressure: 8 bar

Bursting pressure: 24 bar

Heat resistance: -30°C/+80°C

Interior: NR/SBR, white, smooth, abrasion resistant, fodd quality

Exterior: sBR, black, fabric imprinted

Linings: steel wire spiral, fabric lining and two crossed wire helix

Vacuum: -0,8 bar

Abrasion resistance: 100 - 110mm3 according to ISO 4649 (earlier DIN 53516) standard

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Wall thickness (mm)	Outside Ø (mm)	Roll size (m)	Article number
75	8	91	40	3565 075000
100	10	120	20	3565 100000