
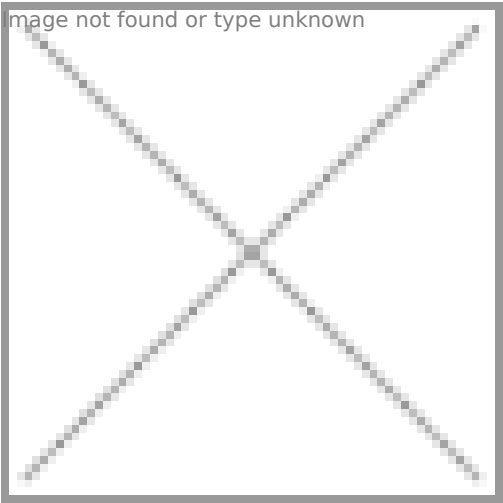


SOLVO-UPE FDA Rubbe

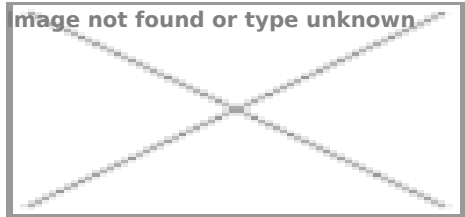

se

is suitable for use in the food and chemical

erent diameters, request a quotation.

- Burstig pressure:** 54 bar
- Heat resistance:** -35°C/+100°C (depending on the transfered medium)
- Interior:** UPE marbled, electrically conductive, smooth, FDA
- Exterior:** EPDM rubber, black, fabric imprinted, electriccal conductive (106Ω) abrasion ozone and weather resistant
- Roll size:** 40

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Wall thickness (mm)	Bending radius (mm)	Vacuum (bar)	Weight (kg/m)	Article number
19	5	120	-0,4	0,41	230059
25	5	150	-0,3	0,52	230054
13	3,5	80	-0,4	0,21	230053