
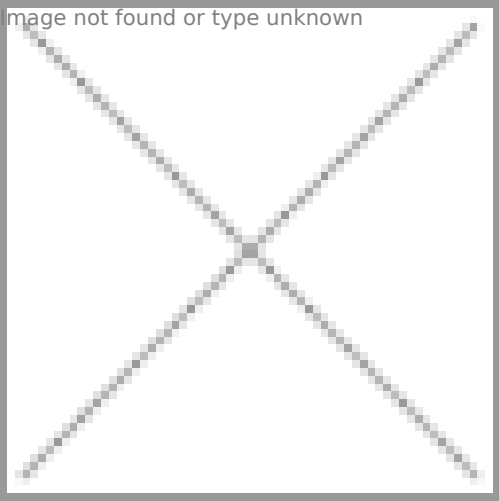


Spurgo/SPL Canal clear

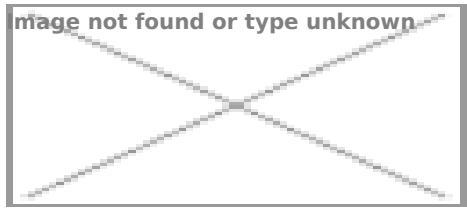

h spiral reinforcement. It's suitable for suction hose. It's creased in a small se can be manufactured with different

Operating pressure: 5 bar

Bursting pressure: 15 bar

Heat resistance: -30°C / +80°C, for short time +100°C

Interior: SBR/NBR rubber, black, smooth, abrasion resistant

Exterior: SBR/NBR, black, smooth, abrasion resistant rubber, fabric imprinted

Linings: strong steel spiral and fabric linings

Roll size: 40 m

Vacuum: -0,9 bar

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

Belső Ø (mm)	Falvastagság (mm)	Külső Ø (mm)	Hajlítási sugár (mm)	Súly (kg/m)	Tekercsméret (m)	Cikkszám
100	9	118	450	5,35	40	105025
110	10,5	131	500	6,2	40	105032
120	10,5	141	540	6,6	40	105033
125	10,5	146	600	6,8	20	105031
150	11,5	173	700	8,8	20	105034