
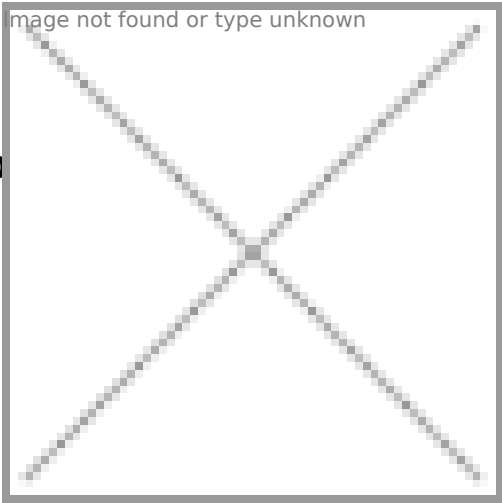


Stainless steel quick connector with thread

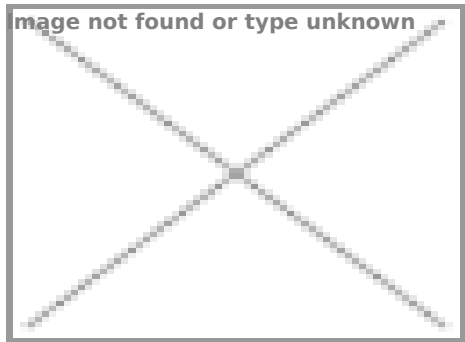

...e thread without valve, but with a ball lock.
...FDA qualified.

Operating pressure: 200 bar

Heat range: +100 C

Material: Nemesacél

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

Female part with female thread

Female thread	Exposed diameter (mm)	Article number
1/4"	11,8	300232
3/8"	11,8	300233
1/2"	11,8	300230
3/4"	11,8	300235

Female part with male thread

Male thread	Exposed diameter (mm)	Article number
3/8"	10	300236
1/2"	11,8	300234

