
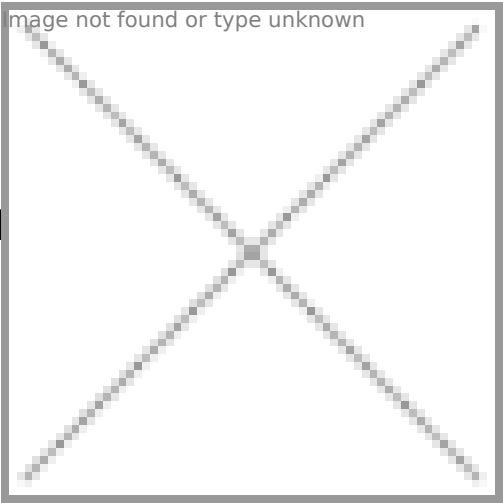


Steam hose coupling with
14423 Galvanised Steel

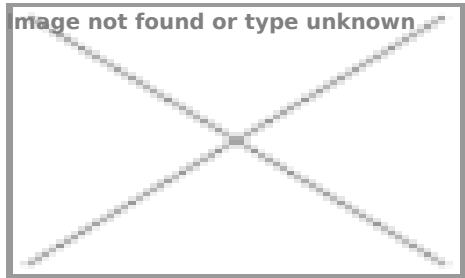

head According to DIN

sealing swivel nut, which is made of
rubber does not contain the clamp, it is

the clamp's screws have to be checked

and tighten.

Operating pressure: On 18 bar for 210°C hot water, on 18 bar for 210°C saturated steam

Material quality: 1.4305

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

Female thread	ID x Wall	Article Nr.
G 1/2"	13 X 6	102841
G 3/4"	19 X 7	102840
G 1"	25 X 7,5	102414
G 1.1/4	32 x 8	102260
G 1.1/2"	38 x 8	102848
G 2"	50 x 9	102849
Male thread	ID x Wall	Article Nr.
G 1/2"	13 X 6	102842
G 3/4"	19 X 7	102839
G 1"	25 X 7,5	102843
G 1.1/4	32 x 8	102844
G 1.1/2"	38 x 8	102846
G 2"	50 x 9	102847