
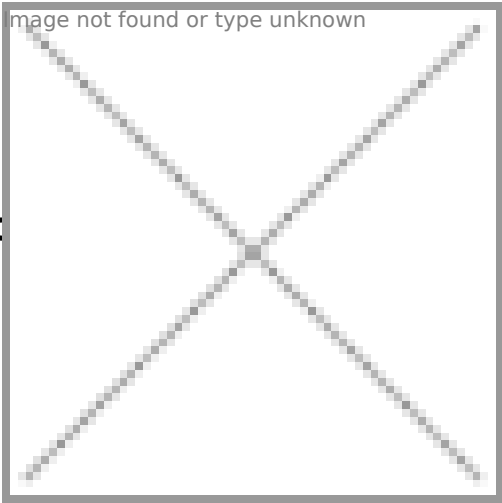


TEMPERFORM/20/B
machine, works with h

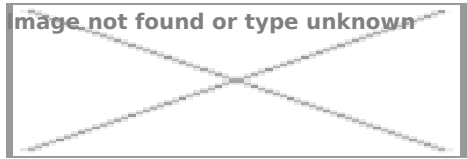

Injection molding

machines in the thermoplastics industry.
hot and cold water in, among other
plastics where the injected plastic in the
order to obtain an optimal end result.

kink-resistant, dimensionally stable and extremely flexible hose.

Felirat: ® TEMPERFORM -20°C / +100°C WASSER/WATER

Working pressure: 20 bar +20°C-on

Burst pressure: 60 bar +20°C-on

Heat resistance: -20°C / +100°C (not for steam or oils)

inside: EPDM, black, smooth

outside: Epdm, blue, smooth

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside diameter (mm)	Wall thickness (mm)	Outer diameter (mm)	Weight (kg/m)	Coil length (m)	Article Nr.
9,5	4,25	18	0,25	40	3128 009001
12,7	4,65	22	0,363	40	3128 013001
19	5,5	30	0,613	40	3128 019001
25	6	37	0,8	40	3128 025001