
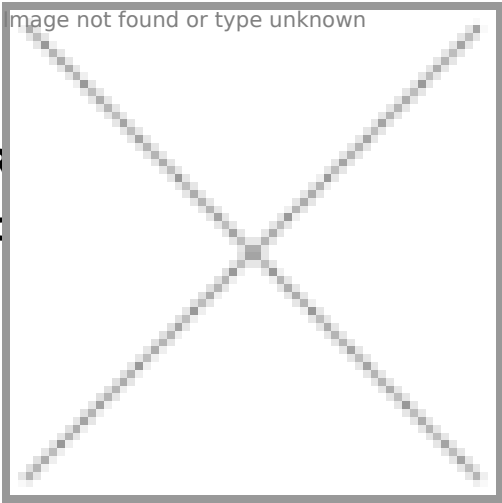


TEMPERFORM/20/RED F
machine, works with ho

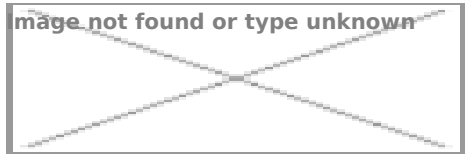

ection molding

machines in the thermoplastics industry.
hot and cold water in, among other
lastics where the injected plastic in the
order to obtain an optimal end result.
kink-resistant, dimensionally stable and extremely flexible hose.

Felirat: ® TEMPERFORM -20°C / +100°C WASSER/WATER

Working pressure: 20 bar +20°C-on

Burst pressure: 60 bar +20°C-on

Heat resistance: -20°C / +100°C (not for steam or oils)

inside: EPDM, black, smooth

outside: Epdm red smooth

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Diameter (mm)	Wall Thickness (mm)	Outer Diameter (mm)	Weight Kg/m	Coil length (m)	Article Nr.
9,5	4,25	18	0,25	40	3127 009001
12,7	4,65	22	0,363	40	3127 013001
19	5,5	30	0,613	40	3127 019001
25	6	37	0,8	40	3127 025001