
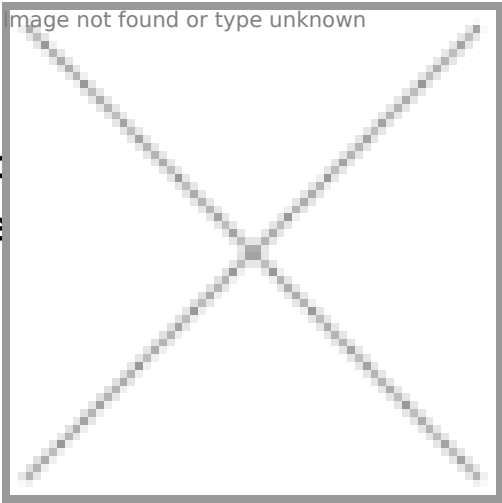


TR Dry Disconnect coupling

TRV series male with female

with female thread (ISO 228 / BSP)

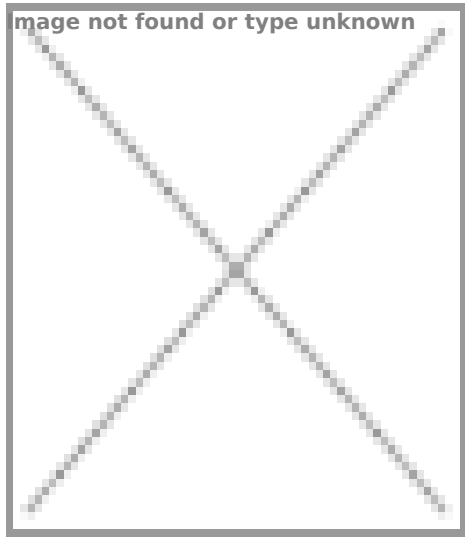

...ction a valve shuts down on both sides, by
...release of the left-over materials
...The components of the coupling are fully
...0°degree turn. In such case the valves
...open up and assure a full flow for the medium.

Available sizes

- DN 25 to DN 100
- Others on request

Materials

- Stainless steel (1.4571/1.4408)
- Hand wheel (TRM 40 – 100)
- Polypropylene
- Others on request

Connections

- Thread: BSP, NPT
- Flanges: EN, ASME
- Others on request

Seals

- O-ring: FPM, EPDM, FFKM, NBR
- Threaded seal: PTFE
- Others on request

Applications

Suitable for all loading and transfer processes in the area of fluid handling, e.g.

- Loading tank wagons
- Loading tank trucks
- Loading containers
- Loading ships
- Loading aircraft
- Filling barrels
- IBC containers
- Coupling stations
- Particularly in processes involving hazardous media
- Can be used with all fluids (liquids and gases). Including rapid-hardening, light pasty and highly viscous media
- Can be used with all types of hoses

DN	Thread	D (mm)
25	G 1	44

DN		D (mm)	
32		54	
40		63	
50		80	
65		94	
80		118	
100		146	

