
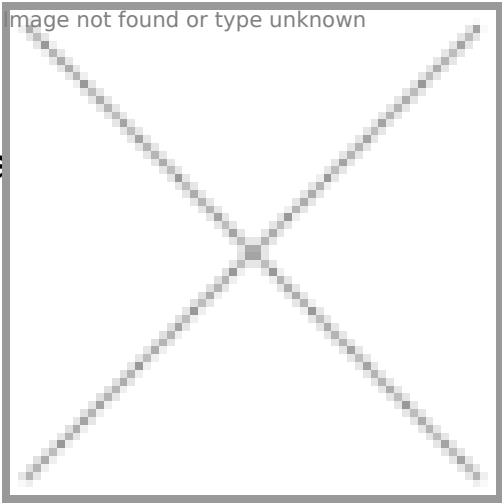


Virgin PTFE hose Uncoated

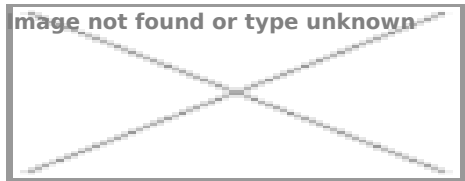

polytetrafluoroethylene) hose is suitable for high temperature applications, also qualify for the foods and cosmetics industries as bushing of electric cables in heat

connectors can be transferred with a black, antistatic design or with acid resistant coating.

Heat resistance: -70°C / +260°C

Standard: 21 CFR 177.1550., 21 CFR 178.3297., according to the US Pharmacopeia class VI. regulations, BPSA/FDA, 3-A health standard, European Migration Directive 1935/2004.

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Tolerance (mm)	Outside Ø (mm)	Falvastagság (mm) w Wall thickness (mm)	Operating pressure on 20°C (bar)	Article number
1	±0,20	3	1	30	200193
2	±0,20	4	1	23	200177
3	±0,20	5	1	18	200031
4	±0,20	6	1	15	200178
5	±0,25	7	1	13	200152
6	±0,25	8	1	11	200179
8	±0,30	10	1	9	200180
10	±0,30	12	1	8	200181
12	±0,35	14	1	7	200184
14	±0,35	16	1	6	200061
16	±0,40	18	1	5	200194
18	±0,40	20	1	5	200195
20	±0,40	22	1	4	200014
22	±0,50	25	1,5	6	200197
25	±0,50	28	1,5	5	200155

