
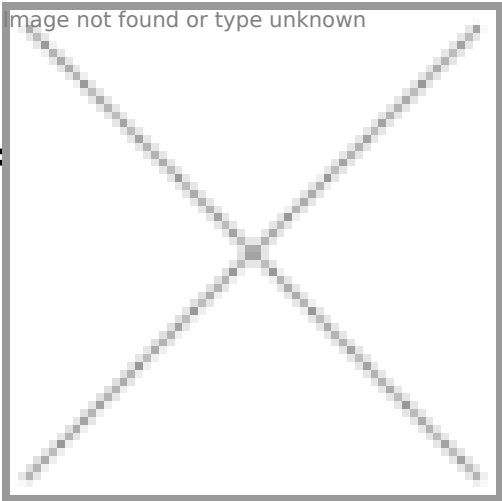


Vaporcord®/Alim/FDA F and cleaning hose

with fabric insertion

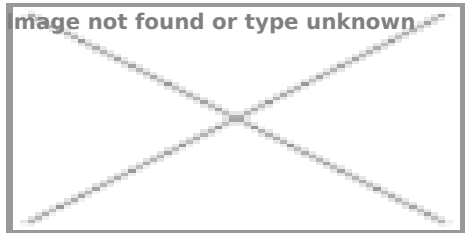

hose for the food industry, and steam cleaning in large kitchens, industry's processing plants etc. Because of up on to a hose reel. The exterior of the hose is persistent against poultry's fat.

It is suitable for food transporting, especially for milk and other dairy products, also for fruit juices, animal and vegetable fats and oils.

After use, you have to let out of the left over water or steam. The use of the hose with overheated steam causes premature aging. Ask for our advice especially, if you plan to use it with steam!

The hose is in line with the regulations, according to the EG1935/2004, BfR XXI:2002(KAT2), FDA (CFR21 § 177.2600).

Felirat: ® VAPORCORD®/ALIM/EXTRA - LOGO MANUFACTURER - STEAMHOSE / DAMPFSCHLAUCH HOT WATER PN .. BAR MAX. 100°C / STEAM PN 6 BAR MAX. 164°C - EG1935/2004 - BFR XXI KAT 2 - FDA CFR21 § 177.2600

Standard: EG 1935/2004, BfR XXI:2002 (cat.2), FDA (CFR 21 par. 177.2600)

Operating pressure: 20 bar (*30 bar) water / 6 bar saturated steam

Bursting pressure: 60 bar

Heat resistance: -30°C /+100°C for water / 164°C for saturated steam

Exterior: modified elastomer, blue, smooth (*cover smooth extruded

Interior: NBR, smooth, white

Roll size: 40 m

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Wall thickness (mm)	Outside Ø (mm)	Weight (kg/m)	Bending radius (mm)	Article number
10*	4,5	19	0,26	60	3406 010000
13*	5	23	0,35	65	3406 013000
19*	6	31	0,6	100	3406 019000
25*	6	37	0,8	125	3406 025000
32	7	46	1,1	195	3406 032000
38	8	54	1,45	250	3406 038000
50	8	66	1,8	350	3406 050000